


COMPANY NAME _____ PHONE _____
CONTACT _____ ACCOUNT NO. _____ FAX _____
JOB NAME _____ EMAIL _____

QUOTE ORDER P.O. # _____ DATE _____

SERIES	STANDARD PROFILE DIMENSIONS			
	THICKNESS	STILE	TOP RAIL	BOTTOM RAIL
250T NARROW STILE THERMAL DOOR	1-3/4"	3"	2-7/8"	4-5/16"
250AT NARROW STILE ADVANCE THERMAL DOOR	1-3/4"	3" (Foam Filled)	2-7/8" (Foam Filled)	4-5/16" (Foam Filled)
OPTIONAL				10"

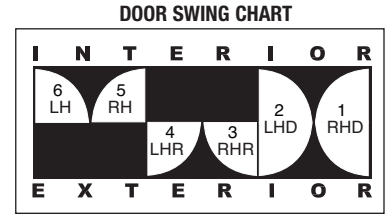

Use the Door Swing Chart to determine how the door(s) should be handed.

APPLICATION : LIGHT TO MODERATE TRAFFIC

DOOR STILE

- 250T Narrow Stile Thermal Door
- 250AT Narrow Stile Advance Thermal Door

DOOR FINISH

- 11 - Clear Anodized Class I - Standard
- 22 - Dark Bronze / Black Anodized Class I
- 52 - Bone White 70% KYNAR® (2-Coat)
- 71 - Standard 70% KYNAR® (2-Coat)
Standard Color per Chart- Specify _____
- 71 - Custom 70% KYNAR® (2-Coat) - Specify _____
- 71 - Custom 70%KYNAR®(3-Coat) - Specify _____

DOOR OPENING SIZE

- 36" x 84"
- Custom Single _____
Door Tag # _____
- 72" x 84"
- Custom Pair _____
Door Tag # _____
Maximum Leaf Size 48" x 96"

GLASS STOP

1" (25 mm) Square Glass Stops

TOP RAIL - INCLUDES GLASS STOP

- 2-7/8" HT201 (Standard)
- 4-5/16" HT101
- 6" WT201

BOTTOM RAIL - INCLUDES GLASS STOP

- 4-5/16" HT101 (Standard)
- 6" WT201
- 7-1/4" JT650
- 10" WT196

MUNTINS - INCLUDES GLASS STOP

- 3-5/8" (HT202)
- 5-1/16" (MT101)
- 6-3/4" (MT201)
- 8" (JT650)
- 10-3/4" (MT196)

DOOR SWING **QTY**

- LHR Hinge Left Swing Out _____ ea.
- RHR Hinge Right Swing Out _____ ea.
- LH Hinge Left Swing In _____ ea.
- RH Hinge Right Swing In _____ ea.
- PAIR Swing In _____ ea.
- PAIR Swing Out _____ ea.

DOOR HINGING

- Top/Bottom and Intermediate Offset Pivots (OP500/DH010)
- Additional Pivot DH010
Add _____ per Door
- 1-1/2 Pair Butt Hinges (DH009)
- Additional Butt Hinge
Add _____ per Door
- Continuous Geared Hinge (DH492)
- By USALUM
- By Customer
- Prep and Supply
- Prep Only (Selection Above)
- No Prep

LOCKING OPTIONS

- MS Hookbolt With Two Cylinders - **STD**
 - Long Throw Deadlock With Cylinders
 - 3-Point Locking @ Pair With Cylinders
 - Latch/Deadlock (DH189) With Cylinders
 - Thumbturn in Lieu of Cylinder
 - Latchlock (DH002)
 - Cylinder (Ext.) Cylinder (Int.)
 - Thumbturn (Int.)
 - Lock Indicator
 - Cylinder Guard
 - Flushbolts (DH008)
 - Paddle Handle
 - DH569 Lever Handle
 - Interior Back to Back
 - CRL DL2150 Lever Handle
 - Interior Back to Back
 - Electric Strike
 - Custom By USALUM By Customer
 - Prep and Supply Prep Only
- NOTE:** Prep Only Requires Manufacturer's Name , Model, and Template
Manufacturer: _____
Model: _____

PUSH/PULL HARDWARE

- Standard Push/Pull
 - Offset Pulls
 - None _____
 - Custom By USALUM By Customer
 - Prep and Supply Prep Only
- NOTE:** Prep Only Requires Manufacturer's Name, Model, and Template
Manufacturer: _____
Model: _____

FOR OFFICE USE ONLY

TAKEN BY: _____
PRICED BY: _____
EDITED BY: _____

PANIC DEVICES

- Jackson 1295 Rim Panic Device
- Jackson 2095 Rim Panic Device
- Jackson 1095 Rim Panic Device
- Adams-Rite 8400 Mortise Panic Device
- Adams-Rite 8800 Rim Panic Device
 - Exit Only
- By USALUM
- By Customer
- Prep and Supply
- Prep Only (Selection Above)

DOOR SWEEP

- Yes No
- Exposed Fasteners
- Concealed Fasteners

HARDWARE FINISH **DOOR FINISH**

- Clear 11, 12, 52, 71
- Bronze 22
- Specify

DOOR CLOSER

- O.H. Concealed (Offset-Prep Only)
 - Excluding HT201 Top Rail
- Standard Jackson Closer (Supply)
 - Excluding HT201 Top Rail
- 90° 105° Hold Open Yes No
- CRL Surface Mount Closer (Supply)
- Drop Plate
- Door Stop/Holder Degree _____
- No Closer Required
- Custom By USALUM By Customer
- Prep and Supply Prep Only

NOTE: Prep Only Requires Manufacturer's Name, Model, Template, and Confirm Capability.

Manufacturer: _____
Model: _____

FRAME SYSTEM

Series IT451 2" x 4-1/2" Open Back Subframe 1" x 4-1/2" (Thermal) Tubular Only

FRAME TYPE

- Up and Over (No Transom)
- 126" (3.2 m) High With Transom
- Frame Only
- Door Only (No Frame)
- Custom

CLEARANCES/THRESHOLD

Clearance from Bottom of Door to Finish Floor

- 11/16" Standard
 - Custom Clearance
- Specify _____

- TT245 1/2" Threshold

ADDITIONAL NOTES OR SKETCHES

--

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____

APPROVED BY _____

DATE _____