

ENTRANCE SYSTEMS

SERIES 375TC MEDIUM STILE AND 500TC WIDE STILE THERMAL DOORS



Series 375TC Medium Stile

- Doors and Frame are Thermally Broken
- Exceptional Thermal Performance with U-factors as Low as 0.40
- 3-3/4" (95 mm) Medium Stiles
- 2-1/4" (57 mm) Thick
- 4" (102 mm) Top Rail
- Standard 8" (203 mm) Bottom Rail, 10" (254 mm) and 12" (305 mm) Rails Available
- Includes Glass Stops for 1" (25 mm) Glazing



Series 375TC Medium Stile Thermal Doors are designed to provide excellent protection against heat transfer. The NFRC-rated doors are thermally broken and can produce U-factors as low as 0.40.

Series 375TC Medium Stile Thermal Doors feature 3-3/4" (95 mm) stiles and a 2-1/4" (57 mm) thick. The doors come standard with an 8" (203 mm) bottom rail. Optional 10" (254 mm) or 12" (305 mm) ADA-compliant bottom rails are also available. Series 375TC Thermal Doors are compatible with all CRL-U.S. Aluminum thermal storefronts and curtain walls.

Series 500TC Wide Stile

- Doors and Frame are Thermally Broken
- Exceptional Thermal Performance with U-factors as Low as 0.40
- 5" (127 mm) Wide Stiles
- 2-1/4" (57 mm) Thick
- 4" (102 mm) Top Rail
- Standard 8" (203 mm) Bottom Rail, 10" (254 mm) and 12" (305 mm) Rails Available
- Includes Glass Stops for 1" (25 mm) Glazing




Series 500TC Wide Stile Thermal Doors are designed to provide a complete thermal barrier with excellent protection against heat transfer. The NFRC-rated doors are thermally broken and can produce U-factors as low as 0.40.


Series 500TC Wide Stile Thermal Doors feature 5" (127 mm) stiles and a 2-1/4" (57 mm) thick. The doors come standard with an 8" (203 mm) bottom rail. Optional 10" (254 mm) or 12" (305 mm) ADA-compliant bottom rails are also available. Series 500TC Thermal Doors are compatible with all CRL-U.S. Aluminum thermal storefronts and curtain walls.

SERIES 375TC MEDIUM STILE AND 500TC WIDE STILE TYPICAL DETAILS


TOP RAIL WITH 1" FRAME

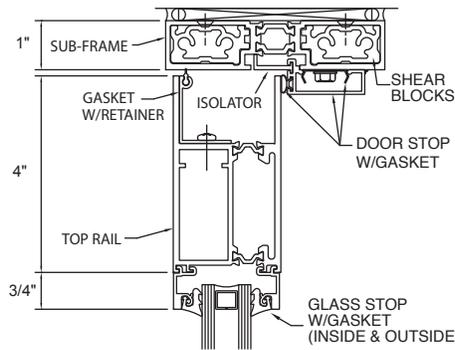


TOP RAIL WITH 2" FRAME

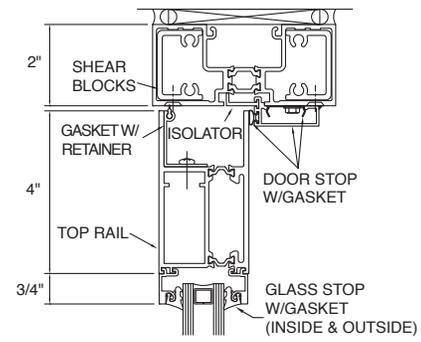


HINGE STILE WITH 1" FRAME AND BUTT HINGE




HINGE STILE WITH 2" FRAME AND BUTT HINGE

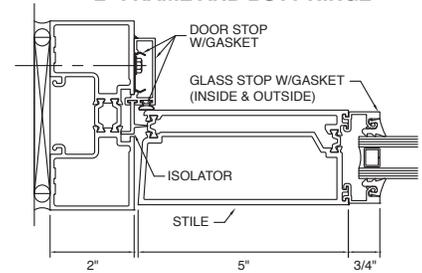


OPTIONAL 8" MUNTIN

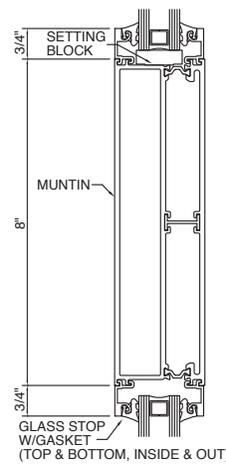


OPTIONAL 4" MUNTIN




HINGE STILE WITH 1" FRAME AND GEARED HINGE




HINGE STILE WITH 2" FRAME AND GEARED HINGE

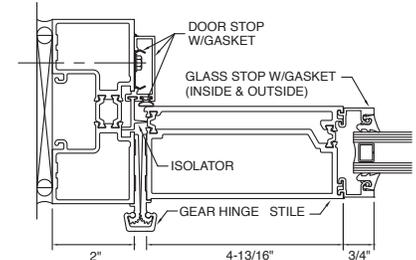


STANDARD BOTTOM RAIL

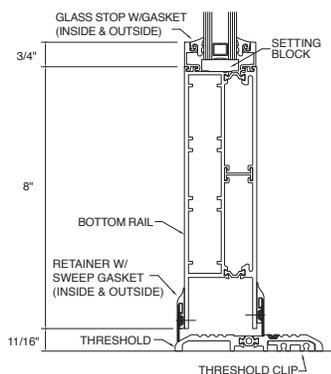

OPTIONAL 10" BOTTOM RAIL

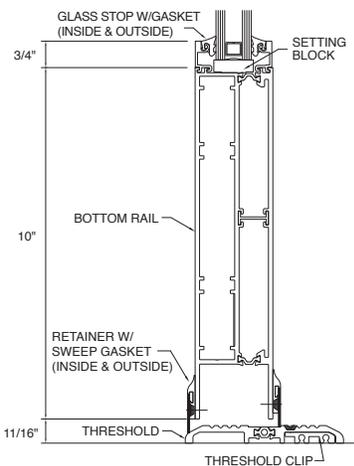

OPTIONAL 12" BOTTOM RAIL

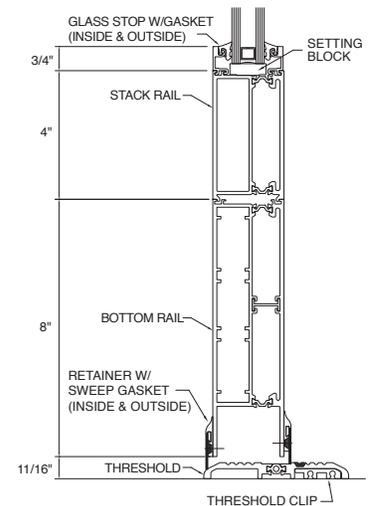

NOTE: Refer To Installation Instructions.

NOT TO SCALE

AVDB4363_09.19