


CURTAIN WALLS

SERIES 3250 CURTAIN WALL




- 2-1/2" (63 mm) Face Dimension
- 1/4" and 1" (6 and 25 mm) Glazing Systems
- Multiple System Depths
- Exterior Glazed
- Injection Molded Water Deflectors
- Thermally Improved
- Pressure Bar Glazing
- No Exposed Fasteners

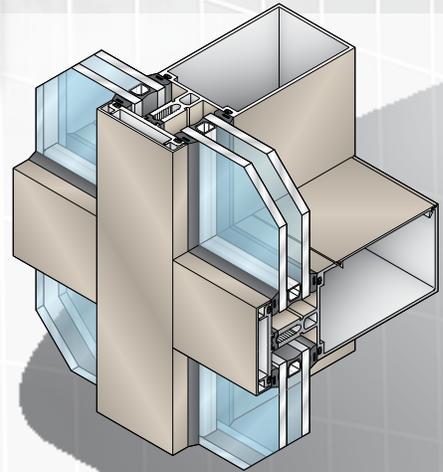


Strength, versatility, and economics make the Series 3250 Curtain Wall an industry favorite for low to mid-rise applications where exterior glazing is desired. Complementing the efficiency of insulating glass, Series 3250 Curtain Wall is thermally improved by a continuous thermal spacer interlocked within the pressure plates. Two-tone colors can be achieved by specifying different finishes for the exterior face covers and interior mullions. Two piece horizontals and extruded shear blocks allow for a concealed horizontal to vertical joinery without exposed screws.


SERIES 3250 TYPICAL DETAILS

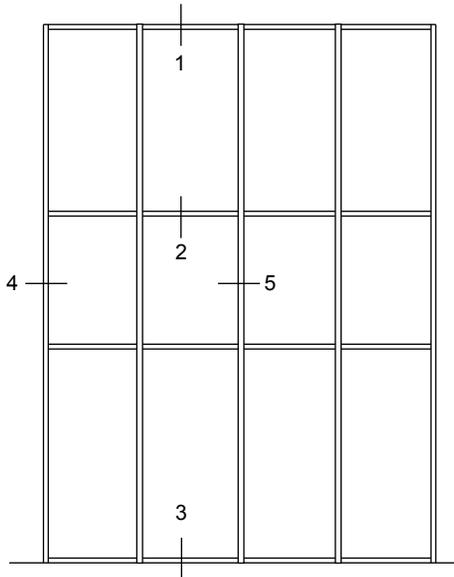


TYPICAL ELEVATION

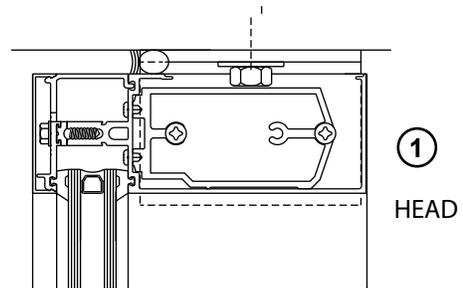

①
HEAD

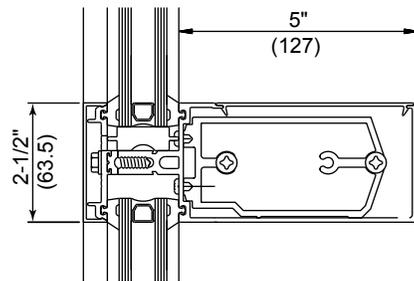


②
HORIZONTAL

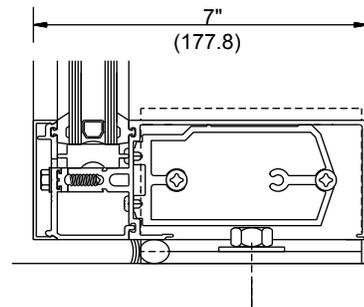


③
SILL

4", 5", and 8" (102, 127, and 203 mm) Backmembers are available. 1/4" (6 mm) glazing is also available.

For Specifications, Details, and Testing Data go to usalum.com.

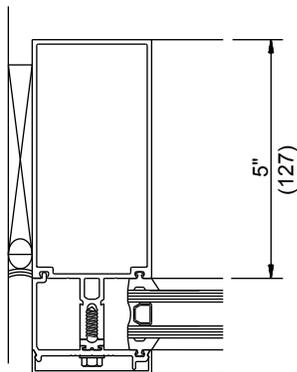

④
JAMB



⑤
VERTICAL

NOT TO SCALE