

WINDOWS

SERIES 8100

FIXED WINDOW

US ALUMINUM




- Tested to AAMA CW60
- Thermally Insulated
- NFRC Certified
- U-Factors as Low as 0.34
- 4-1/2" (114 mm)
Deep Frame to Match Typical
Building Conditions
- Choice of Block or Fin Frame
- 1" (25 mm) Glazing
- Accessories such as Mulling Bars,
Subsills, Head and Jamb Channels
are Available
- Available in an Array of Architectural
Coatings and Anodized Finishes
- Made in the USA



The Series 8100 Fixed Window has a 4-1/2" (114 mm) deep frame designed to match typical building conditions, including our entrances and storefronts. An efficient thermally insulated frame accepts 1" (25 mm) glazing. Available in an array of architectural coatings and anodized finishes.

CRL
US ALUMINUM
usalum.com • crlaurence.com
crl-arch.com

SERIES 8100 FIXED WINDOW TYPICAL DETAILS

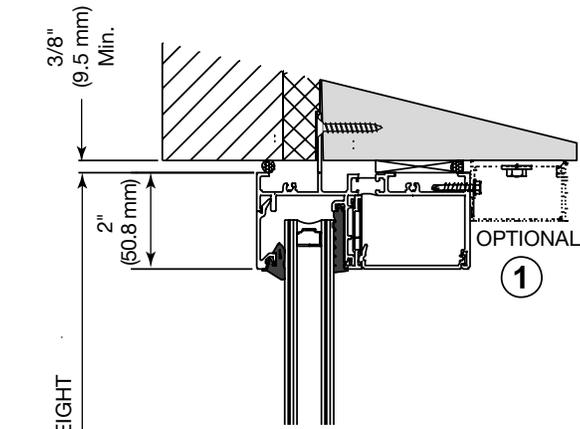

Maximum Frame Size
56" x 63" (1422 x 1600 mm)


A complete set of
details in DWG
format is available at
usalum.com

Meets or Exceeds Specifications:



- AAMA/WDMA/CSA 101/1.S.2/A 440 -08
 - ASTM E 283-04
 - ASTM E 330-02
 - ASTM E 331-00
 - AAMA 1503
- NFRC - NFRC 100-2004
 - NFRC 200-2004
 - NFRC 500-2004
- Buy America Act- FAR 52.225-9, 11 & 12

NOTE:

1" (25 mm) Glazing Shown

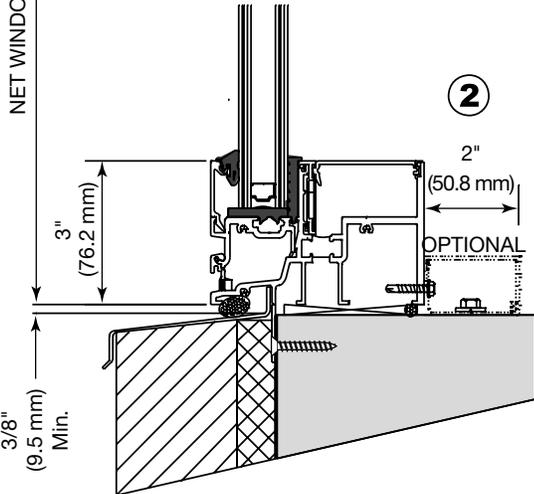

Fin Frame
Installation
Method Shown

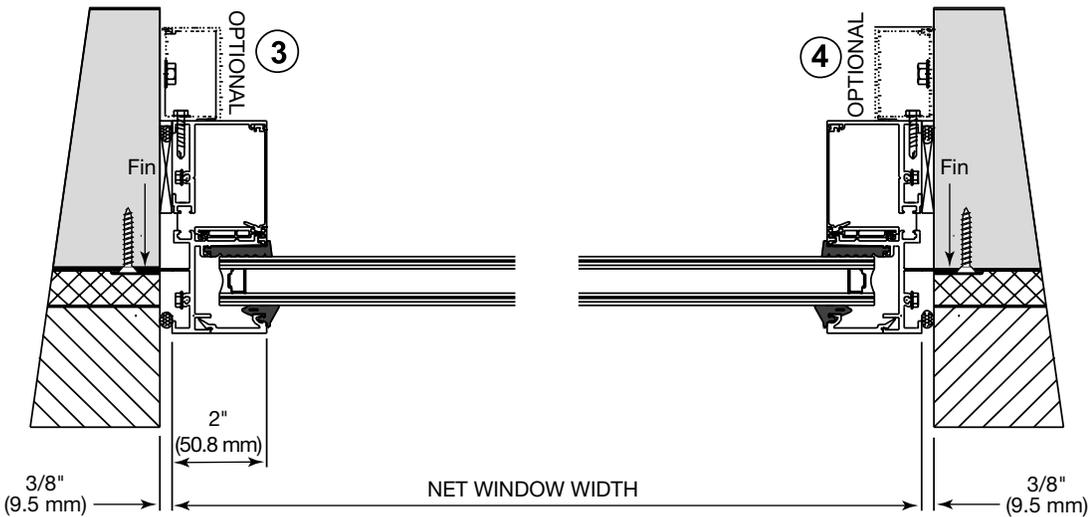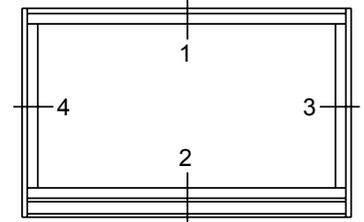

NOT TO SCALE

AVDB4213_02/22/16