


MODEL: PR80 SERIES

Installation Instructions for TOP JAMB (PUSH SIDE) Mounting

THIS TEMPLATE COVERS TOP JAMS INSTALLATIONS TO 180° OPENINGS.

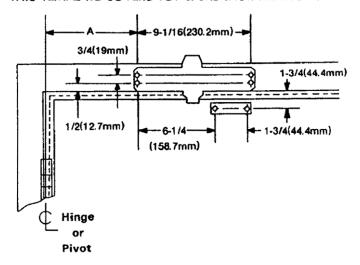

- Left hand door shown
- Right hand door opposite
- Dimensions are in inches
- Do not scale drawing

INSTALLATION INSTRUCTIONS

- Select door opening angle and use dimensions shown above, mark four(4) holes on frame for door closer and two(2) holes on door of arm shoe.
- Drill pilot holes in door and frame for #14 all-purpose screws or drill and tap for 1/4-20 machine screws.
- Install forearm/arm shoe assembly to door using screws provided.
- Mount closer on frame using screws provided. SPEED ADJUSTING VALVE MUST BE POSITIONED TOWARD HINGE EDGE.
- Install main arm to top pinion shaft, perpendicular to door as shown below. Secure tightly with arm screw/washer assembly provided.
- Adjust length of forearm so that forearm is perpendicular
 to frame when assembled to preloaded main arm(illustration
 below). Secure forearm to main arm with screw/washer
 assembly provided.
- 7. Snap pinion cap over shaft at bottom of closer.
- 8. Adjust closing speed of door, following instructions as shown

POWER ADJUSTMENT CHART FOR DOOR SELECTIONS							
DOOR CLOSER SIZE		CLOCKWISE TURNS OF ADJUSTING NUT		APPLICABLE DOOR SIZE		APPLICABLE DOOR	
PR82 (SIZE 1-4)	PR80 (SIZE 2~5)	PR82 (SIZE 1~4)	PR80 (SIZE 2~5)	INTERIOR	EXTERIOR (SWING OUT)	***	
1	Not Recommended Use	0 (FACTORY SET)	N/A	32" (0.81m)	28" (0.71m)	33-66 Lbs (15-30 kg)	
2	2	4	0 (Factory Set)	36" (0.91m):	32" (0.81m)	66-99 Lbs (30-45 kg)	
3	3	8	4	42' (1.07m)	36" (0.91m)	99-143 Lbs 145-85 kg)	
4	4	13	8	48' (1.22m)	42" (1.0 7m)	143-187 Lbs (85-85 kg)	
Not Recommended Use	5	N/A	13	54" (1.37m)	48" (1.22m)	187-264 Lbs (85-120 kg)	

OPENING	DIM. A		
To 120°	6 1/2(165.1mm)		
120°-180°	4(101.6mm)		

OPENING CYCLE

NOTE: These instructions apply only to closers equipped with backcheck.

- To increase backcheck intensity, turn valve marked "BC" clockwise.
- To decrease backcheck intensity, turn valve marked "BC" counter-clockwise.

